

R package **intsvy**

Demonstration

Dr. Daniel Caro

The use of test scores in secondary analysis
OECD Paris, 14 June 2019

What is **intsvy**?

- R package that provides tools for the analysis of ILSA data
 - Merge and import data
 - Analyze data (eg. means, percentages, regression)
 - Visualize results
- ILSA studies
 - PISA, TIMSS, PIRLS, PIAAC, ICILS, and extendable

Online resources for `intsvy`

- Learning resources are available at <http://danielcaro.net/r-intsvy/>
 - Video tutorials
 - pdf tutorial (article published in *Journal of Statistical Software*)
 - Data analysis examples
 - R-bloggers articles

Video tutorials

Video tutorials

[Video 1: Installing R 'intsvy'](#)

[Video 2: Directory paths and operating systems](#)

[Video 3: Printing data labels](#)

[Video 4: Importing data](#)

[Video 5: Calculating average student performance](#)

[Video 6: Frequency tables](#)

[Video 7: Proficiency levels](#)

[Video 8: Regression analysis](#)

JSS article



Journal of Statistical Software

November 2017, Volume 81, Issue 7.

doi: 10.18637/jss.v081.i07

intsvy: An R Package for Analyzing International Large-Scale Assessment Data

Daniel H. Caro

University of Oxford

Przemysław Biecek

Warsaw University of Technology

Abstract

This paper introduces **intsvy**, an R package for working with international assessment data (e.g., PISA, TIMSS, PIRLS). The package includes functions for importing data, performing data analysis, and visualizing results. The paper describes the underlying methodology and provides real data examples. Tools for importing data allow useRs to select variables from student, home, school, and teacher survey instruments as well as for specific countries. Data analysis functions take into account the complex sample design (with replicate weights) and rotated test forms (with plausible values of achievement scores) in the calculation of point estimates and standard errors of means, standard deviations, regression coefficients, correlation coefficients, and frequency tables. Visualization tools present data aggregates in standardized graphical form.

Keywords: international assessments, complex survey analysis, replicate weights, plausible values.

PISA 2015 data analysis examples

Examples with PISA 2015

The data from PISA 2015 can be analysed with the development version of intsvy. The development version of the intsvy package can be installed and loaded with:

```
library("devtools")
install_github("eldafani/intsvy")  
  
library('intsvy')
```

Importing the data

You can create an object with the data directory and then apply the `pisa.select.merge` function.

```
dir <- "/home/eldani/MEGA/Work/international LSA/PISA/2015/Data" # your data directory (eg C:/PISA 2015/Data)  
  
pisa15 <- pisa.select.merge(folder = dir,  
                           student.file="CY6_MS_CMB_STU_000.sav",  
                           school.file="CY6_MS_CMB_SCH_000.sav",  
                           student= c("ESCS", "ST004D01T", "TEACHSUP", "JOYSCIE",  
                                    "IBTEACH", "TDTEACH", "DISCLISCI"),  
                           school = c("EDUSHORT", "SCHLTYPE"))
```

The object `pisa15` is a data frame with selected variables for all education systems participating in PISA 2015. Now you can start to analyse the data. Below are some examples.

Science average performance (PISA 2015 report, Table I.2.3)

```
pisa2015.mean.pv(pvlabel = "SCIE", by = "CNT", data = pisa15)  
  
##                                     CNT  Freq  Mean s.e.    SD s.e.  
## 1          Albania  5215 427.22 3.28 78.48 1.45  
## 2 United Arab Emirates 14167 436.73 2.42 99.14 1.06  
## 3          Australia 14530 509.99 1.54 102.30 0.92  
## 4          Austria  7007 495.04 2.44 97.34 1.31  
## 5          Belgium  9651 502.00 2.29 100.19 1.24  
## 6          Bulgaria  5928 445.77 4.35 101.52 2.10  
## 7          Brazil 23141 400.68 2.30 89.15 1.27  
## 8          Canada 20058 527.70 2.08 92.37 0.88  
## 9 Switzerland  5860 505.51 2.90 99.52 1.55
```

PISA 2015 in R-bloggers



[add your blog!](#) | [Learn R](#) | [R jobs ▾](#) | [Contact us](#)

PISA 2015 – how to
read/process/plot the data with
R

How to install `intsvy`?

- Stable version from CRAN

```
install.packages("intsvy")
library('intsvy')
```

- Development version from Github

```
install.packages('devtools')
library('devtools')
install_github("eldafani/intsvy")
library('intsvy')
```

Examples with PISA 2015

Read data

```
dir <- "C:/PISA15/DATA"

pisa <- pisa.select.merge(folder = dir,
  student.file = "CY6_MS_CMB_STU_QQQ.sav",
  school.file= "CY6_MS_CMB_SCH_QQQ.sav",
  student =c('ST004D01T','REPEAT', 'ESCS', 'BELONG', 'ANXTEST', 'ST001D01T'),
  school = c('PROSTCE', 'PROATCE', 'EDUSHORT', 'STAFFSHORT', 'STUBEHA', 'TEACHBEHA'),
  countries = c("HUN", "POL", "ROU", "RUS", "SVK"))

## re-encoding from CP1252
## re-encoding from CP1252
```

Average with plausible values

Science performance by country


```
pisa2015.mean.pv(pvlabel = "SCIE", by = "CNT", data = pisa)
```

```
##   CNT Freq   Mean s.e.     SD s.e
## 1 HUN 5658 476.75 2.42 96.34 1.58
## 2 POL 4478 501.44 2.51 90.79 1.34
## 3 ROU 4876 434.88 3.23 79.11 1.72
## 4 RUS 6036 486.63 2.91 82.41 1.05
## 5 SVK 6350 460.77 2.59 98.93 1.53
```

Exporting results to spreadsheet

```
pisa2015.mean.pv(pvlabel = "SCIE", by = "CNT", data = pisa,  
                  export=TRUE, folder=dir, name = 'mean_scie')
```

Exporting results to spreadsheet

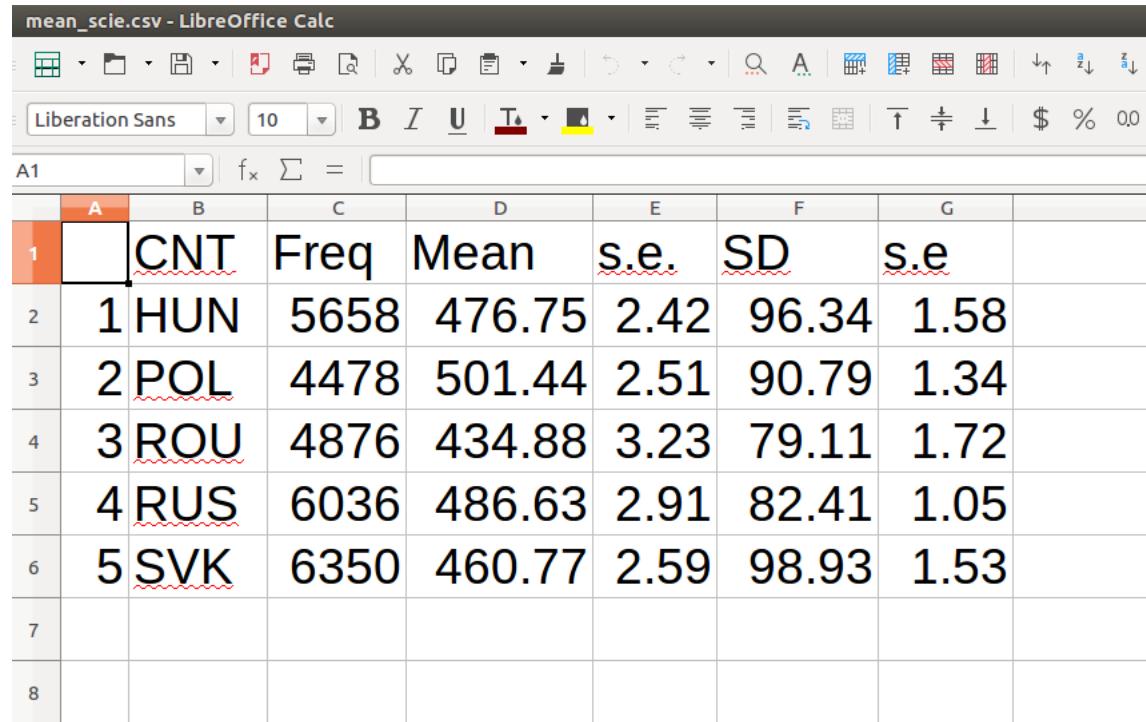

The screenshot shows a LibreOffice Calc spreadsheet titled "mean_scie.csv". The data consists of six rows of statistics for five countries: HUN, POL, ROU, RUS, and SVK. The columns represent CNT (Country), Freq (Frequency), Mean, s.e. (standard error), SD (Standard Deviation), and another s.e. (likely standard error of the mean). The data is as follows:

1	CNT	Freq	Mean	s.e.	SD	s.e
2	1 HUN	5658	476.75	2.42	96.34	1.58
3	2 POL	4478	501.44	2.51	90.79	1.34
4	3 ROU	4876	434.88	3.23	79.11	1.72
5	4 RUS	6036	486.63	2.91	82.41	1.05
6	5 SVK	6350	460.77	2.59	98.93	1.53
7						
8						

Science performance by country and sex


```
pisa2015.mean.pv(pvlabel = "SCIE", by = c("CNT", "ST004D01T"), data = pisa)
```

	CNT	ST004D01T	Freq	Mean	s.e.	SD	s.e
## 1	HUN		1 2850	475.25	2.95	94.46	1.85
## 2	HUN		2 2808	478.24	3.35	98.14	1.83
## 3	POL		1 2209	498.30	2.83	86.87	1.75
## 4	POL		2 2269	504.46	2.95	94.32	1.81
## 5	ROU		1 2466	437.88	3.41	78.24	1.83
## 6	ROU		2 2410	431.86	3.69	79.86	2.07
## 7	RUS		1 3107	484.51	3.08	79.76	1.04
## 8	RUS		2 2929	488.81	3.59	85.00	1.50
## 9	SVK		1 3035	461.22	3.31	96.15	2.04
## 10	SVK		2 3315	460.36	2.98	101.47	1.71

Visualizing results

```
# Store results in object  
scie_sex <- pisa2015.mean.pv(pvlabel = "SCIE", by = c("CNT", "ST004D01T"), data = pisa)  
# Plot object  
plot(scie_sex)
```


Visualizing results

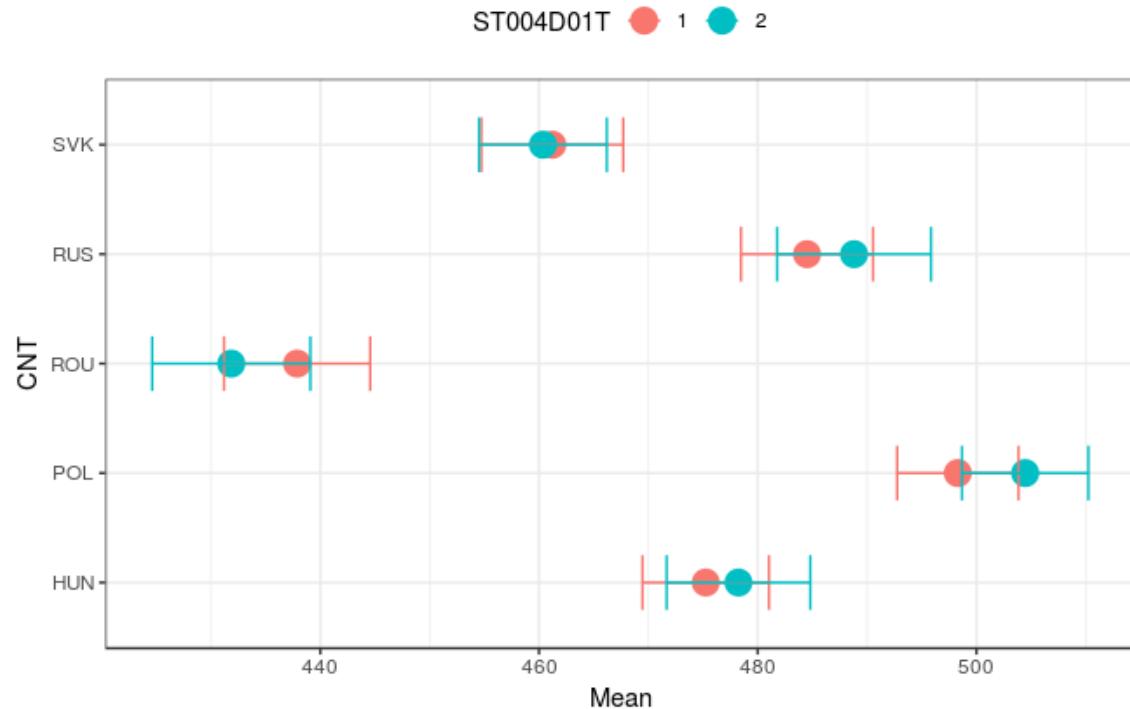

Visualizing results

```
# Use ggplot2 to customize graph
library('ggplot2')
# Change labels in legends
plot(scie_sex) +
  scale_color_discrete(name = "", labels = c("Girls", "Boys"))
```

Visualizing results

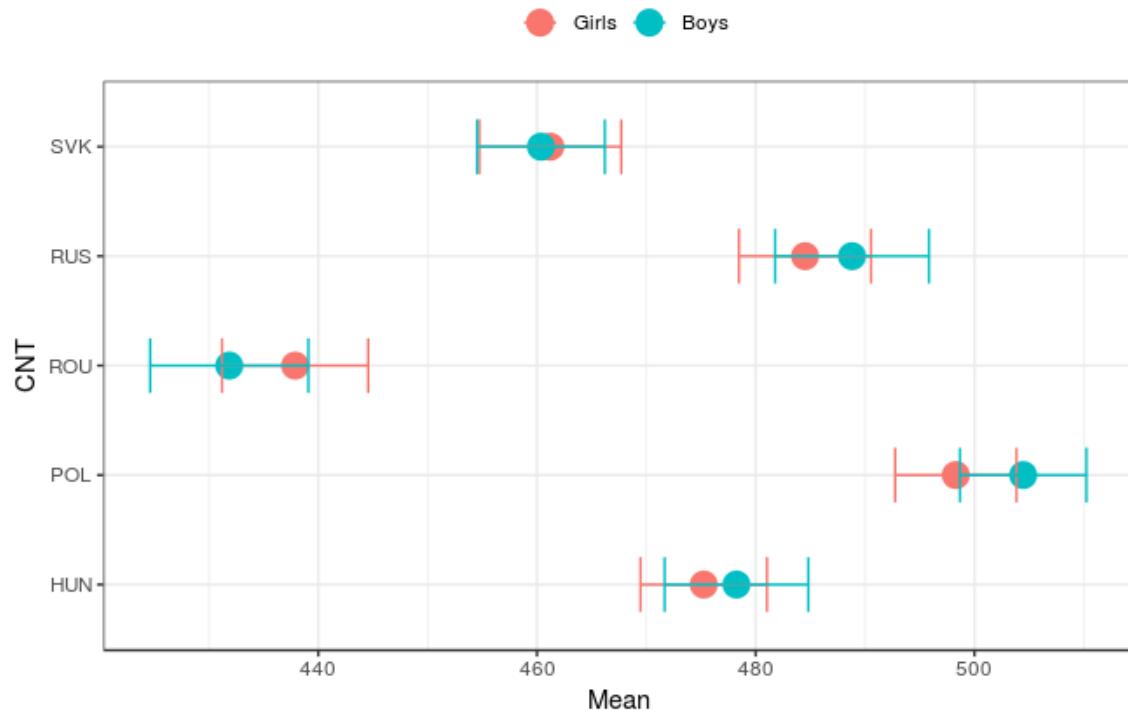

Average without plausible values

Economic, social and cultural status (ESCS)

```
pisa2015.mean(variable = "ESCS", by = "CNT", data = pisa)
```

```
##   CNT Freq  Mean s.e.    SD  s.e
## 1 HUN 5570 -0.23 0.02 0.95 0.01
## 2 POL 4446 -0.39 0.02 0.82 0.01
## 3 ROU 4873 -0.58 0.04 0.87 0.02
## 4 RUS 5789  0.05 0.02 0.73 0.01
## 5 SVK 6257 -0.11 0.02 0.94 0.02
```

Frequency table

Percentage of students by school grade (ST001D01T)

```
pisa2015.table(variable="ST001D01T", by= "CNT", data = pisa)
```

##	CNT	ST001D01T	Freq	Percentage	Std.err.
## 1	HUN	7	40	1.71	0.33
## 2	HUN	8	209	8.49	0.48
## 3	HUN	9	4542	75.80	0.67
## 4	HUN	10	867	13.99	0.49
## 5	POL	7	22	0.64	0.15
## 6	POL	8	170	4.91	0.32
## 7	POL	9	4274	93.82	0.41
## 8	POL	10	12	0.63	0.19
## 9	ROU	7	45	1.43	0.28
## 10	ROU	8	266	8.90	0.54
## 11	ROU	9	3810	74.79	0.89
## 12	ROU	10	755	14.88	0.66
## 13	RUS	7	10	0.18	0.08
## 14	RUS	8	409	6.62	0.32
## 15	RUS	9	4849	79.73	1.47

Proficiency levels

Science performance proficiency levels

```
pisa2015.ben.pv(pvlabel="SCIE",  
                  cutoff = c(260.54, 334.94, 409.54, 484.14, 558.73, 633.33, 707.93),  
                  by="CNT", data=pisa)
```

##	CNT	Benchmarks	Percentage	Std. err.
## 1	HUN	<= 260.54	0.81	0.19
## 2	HUN	(260.54, 334.94]	6.82	0.63
## 3	HUN	(334.94, 409.54]	18.38	0.86
## 4	HUN	(409.54, 484.14]	25.45	0.85
## 5	HUN	(484.14, 558.73]	27.32	0.88
## 6	HUN	(558.73, 633.33]	16.62	0.77
## 7	HUN	(633.33, 707.93]	4.26	0.41
## 8	HUN	> 707.93	0.34	0.12
## 9	POL	<= 260.54	0.32	0.11
## 10	POL	(260.54, 334.94]	2.60	0.36
## 11	POL	(334.94, 409.54]	13.33	0.70
## 12	POL	(409.54, 484.14]	26.60	0.93
## 13	POL	(484.14, 558.73]	29.92	0.93
## 14	POL	(558.73, 633.33]	19.89	0.78
## 15	POL	(633.33, 707.93]	6.30	0.55

Regression analysis with plausible values

Science performance on ESCS and school grade


```
pisa2015.reg.pv(pvlabel="SCIE", x=c("ST001D01T", "ESCS"), by= "CNT", data = pisa)
```

```
## $HUN
##           Estimate Std. Error t value
## (Intercept) 124.89     32.86   3.80
## ST001D01T    40.09      3.59  11.16
## ESCS         43.21      1.83  23.57
## R-squared     0.26      0.02  17.16
##
## $POL
##           Estimate Std. Error t value
## (Intercept) -210.38     51.85  -4.06
## ST001D01T     81.25      5.77  14.09
## ESCS          36.49      2.03  18.01
## R-squared      0.19      0.01  14.08
##
## $ROU
##           Estimate Std. Error t value
## (Intercept) 355.81     30.95  11.50
## ST001D01T    10.93      3.42   3.19
```

Visualizing results


```
# Store results in object  
scie_reg <- pisa2015.reg.pv(pvlabel="SCIE", x=c("ST001D01T", "ESCS"), by= "CNT", data = pisa)  
# Plot object  
plot(scie_reg)
```

Visualizing results

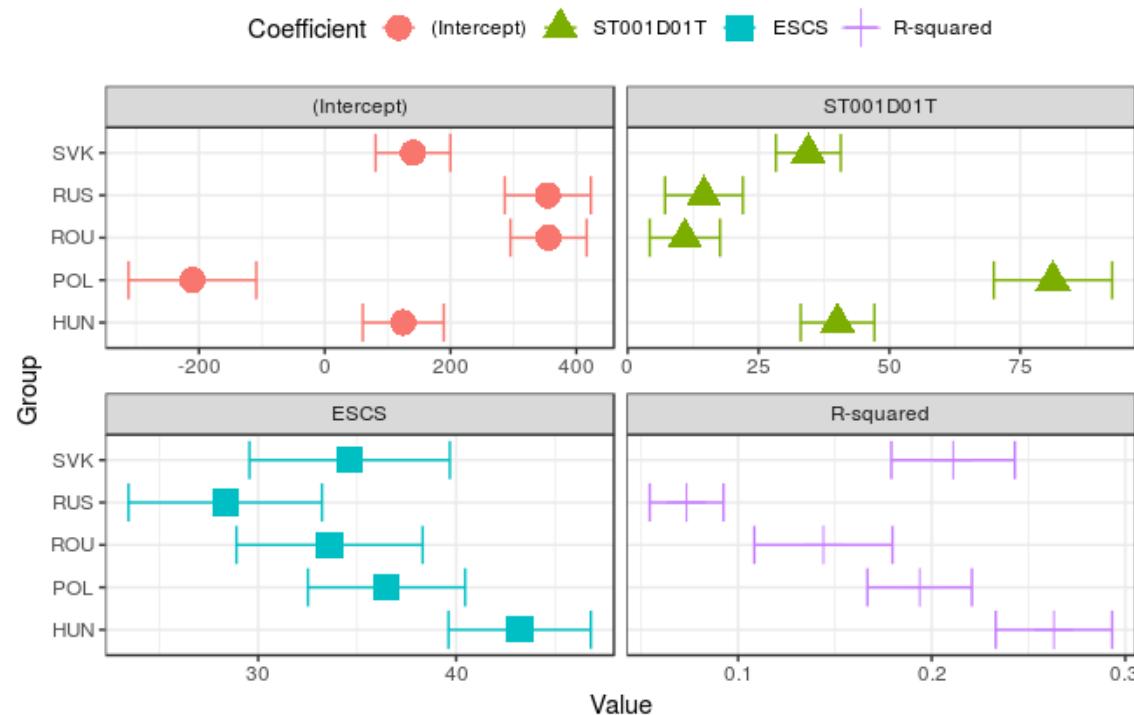

Selected coefficients

```
plot(scie_reg, vars = c("ST001D01T", "ESCS"))
```

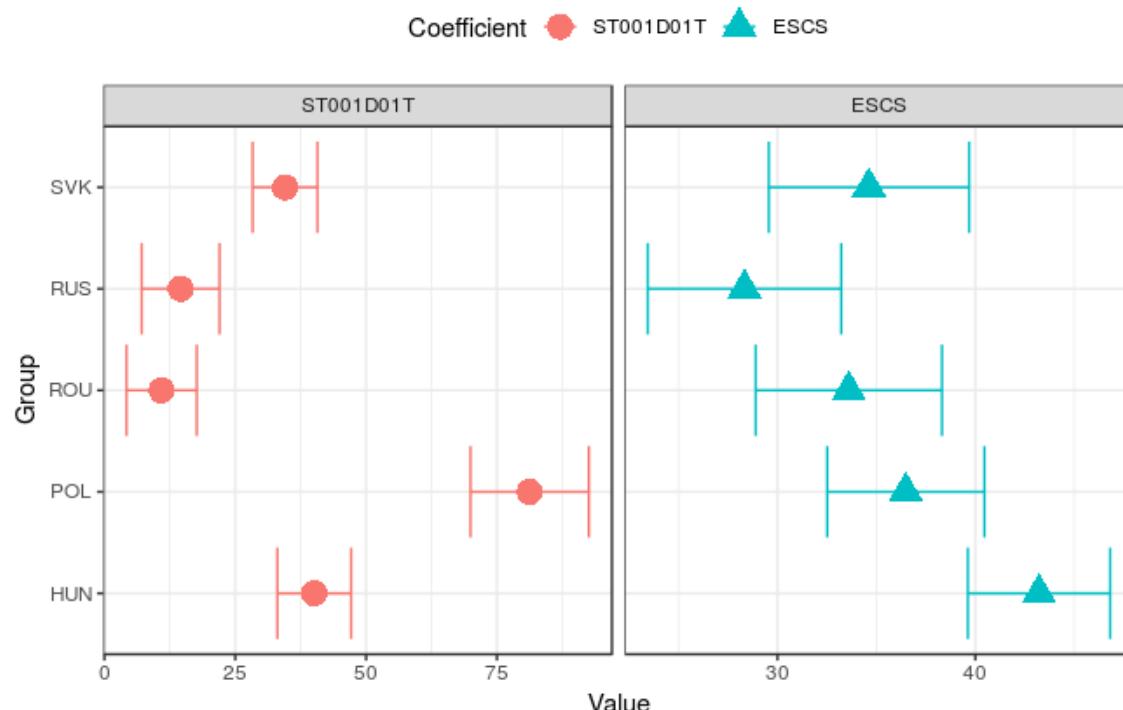

Regression analysis without
plausible values

Sense of belonging to school on ESCS

```
pisa2015.reg(y="BELONG", x="ESCS", by= "CNT", data = pisa)
```

```
## $HUN
##           Estimate Std. Error t value
## (Intercept)    0.09     0.02   4.81
## ESCS          0.12     0.02   7.48
## R-squared      0.01     0.00   3.85
##
## $POL
##           Estimate Std. Error t value
## (Intercept)   -0.24     0.02  -14.59
## ESCS          0.04     0.02   2.38
## R-squared      0.00     0.00   1.19
##
## $ROU
##           Estimate Std. Error t value
## (Intercept)    0.04     0.02   1.43
## ESCS          0.06     0.02   3.86
## R-squared      0.00     0.00   1.87
##
```

Thank you!